


INSTALLATION INSTRUCTION

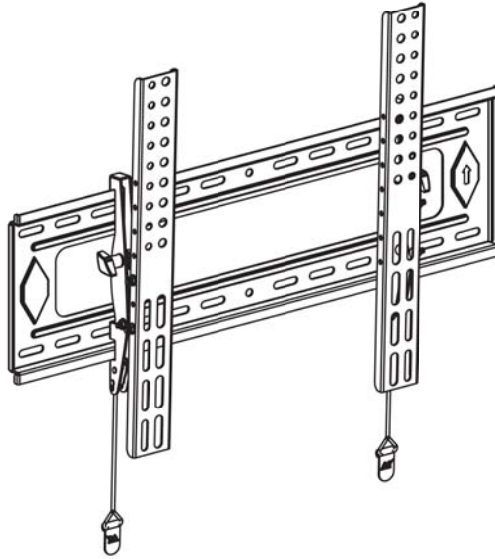


D70-T

**Multi-functional and
professional tilt wall mount**

For TV panels: 50"-70"

Maximum load capacity: 150 lbs / 68.2 kg

VESA: 100x100~600x400mm

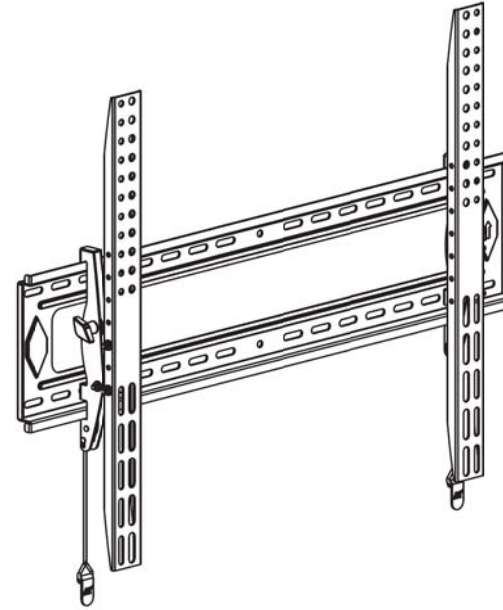

D90-T

**Multi-functional and
professional tilt wall mount**

For TV panels: 60"-90"

Maximum load capacity: 200 lbs / 90.9 kg

VESA: 200x200~800x600mm

Kunshan Hongjie Electronics Co., Ltd

Add: 58, South of Xinxing Road, Economic Development Zone.

Kunshan City, Jiangsu Province, China

TEL: 86-512-57971777

<http://www.nbavmount.com>

FAX: 86-512-57970776

E-mail: info@nbavmount.com

We reserve the right to modify or alter instructions. No modification or alteration without formal notice.

Contents

Contents and warning	1/11
Symbols and Tools	2/11
D70-T Hardware Package list	3/11
D90-T Hardware Package list	4/11
Installation of wall plate	5/11
Attach TV bracket, select spacers and screws	6/11
Attach TV bracket to wall plate	7/11
TV height and tilt adjustment	8/11
Remove TV from the wall plate	9/11
D70-T TV Installation VESA hole and Dimensions	10/11
D90-T TV Installation VESA hole and Dimensions	11/11












Warning

Severe personal injury and property damage can result from improper installation or assembly. Read the following warning carefully before beginning.


- If you do not understand the instructions or have any concerns or questions, please contact a qualified local installer.
- Do not install or assemble if the product or hardware is damaged or missing, if you require replacement parts, please contact your local distributor for assistance.
- (D70-T) fits most 50"-70" LCD/plasma screen; maximum weight of LCD/plasma screen: 150lbs/68.2kg. (D90-T) fits most 60"-90" LCD/plasma screen; maximum weight of LCD/plasma screen: 200lbs/90.9kg.
- Do not use this product for anything other than the original design.
- This product contains moving parts, please use with caution.
- The manufacturer disclaims any liability for the modifications, improper installation, or installation over the specified weight range. The manufacturer will not be liable for any damages arising out of the use of, or inability to use, the product.

Symbols and Tools







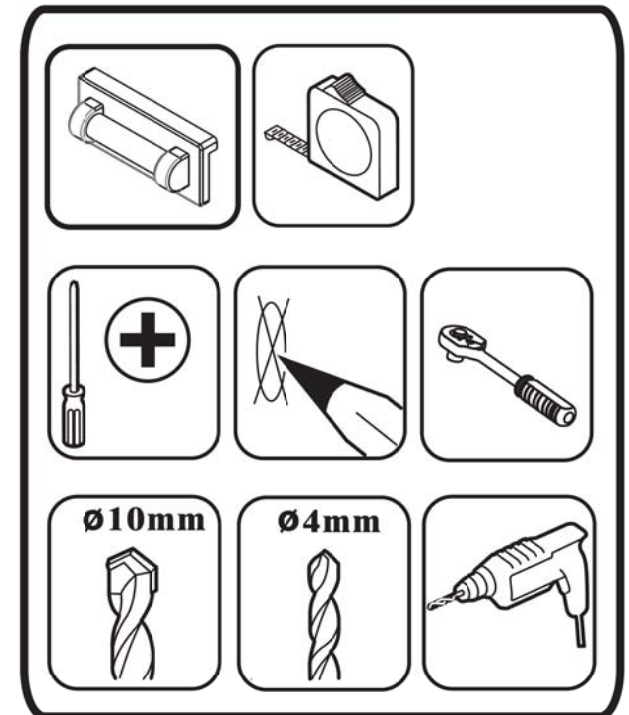




Symbols

	Tightening Direction		By Hand		Open-End Wrench		Hand Drill
	Loosening Direction		Hex Wrench		Adjustment		Remove
	Phillips Screwdriver		Pencil	OPT	Optional		Star Wrench











Tools



D70-T、D90-T Hardware Package list

A1	B1	C1	D1	E1	F1	G1
M5x35	M6x35	M8x35	M10x35	ø16xø6.2x1.5mm	ø15xø8.2x10mm	ø17xø10.2x10mm
						
A2	B2	C2	D2			
Bubble	ø16xø8.2x2.0mm	7x80mm	ø10xø7xL60mm			
						

D90-T Hardware Package list


A1	B1	C1	D1	E1	F1
M6x35	M8x35	M10x35	ø16xø6.2x1.5mm	ø15xø8.2x10mm	ø17xø10.2x10mm
					
A2	B2	C2	D2		
Bubble	ø16xø8.2x2.0mm	7x80mm	ø10xø7xL60mm		
					

Installation steps


1. Installation of wall plate

1. Install wall plate into solid concrete or wood stud.(D90–T)

A. For Solid concrete installation, please follow 1a–3a.

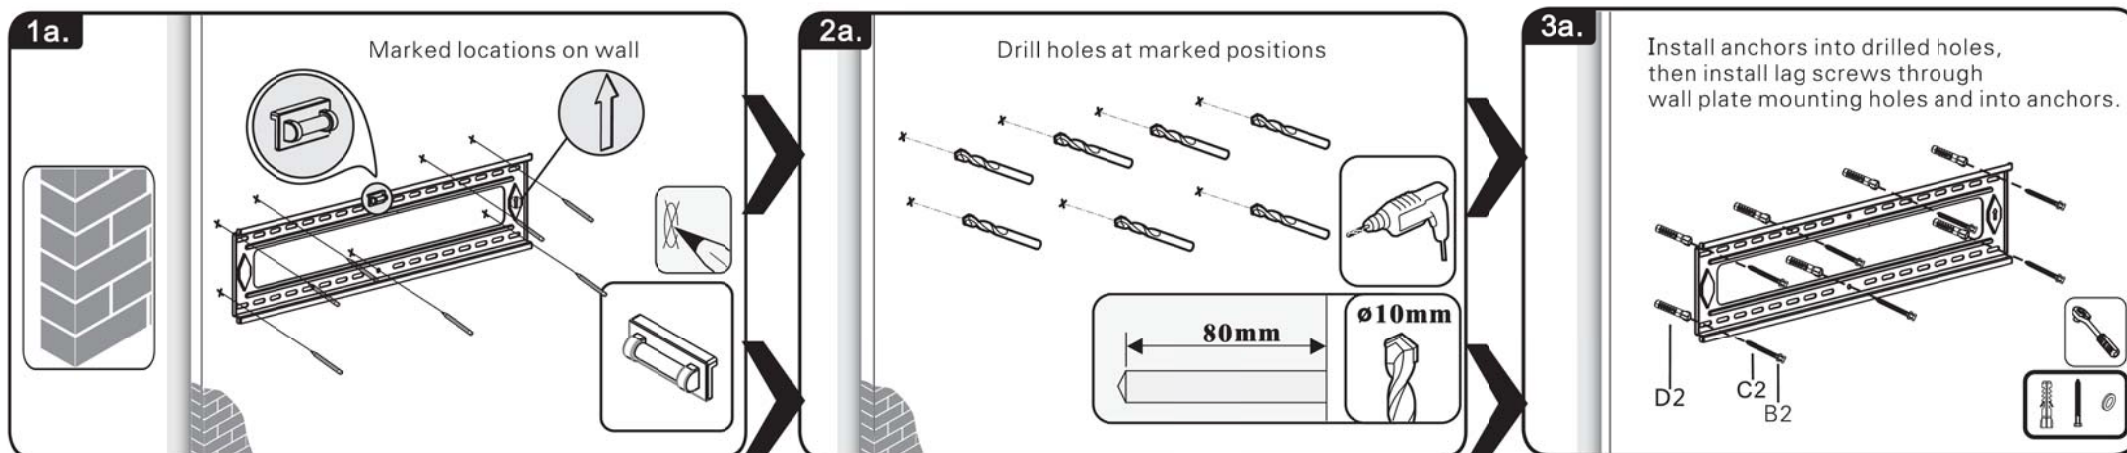

B. For wood stud Installation, please follow 1b–3b.

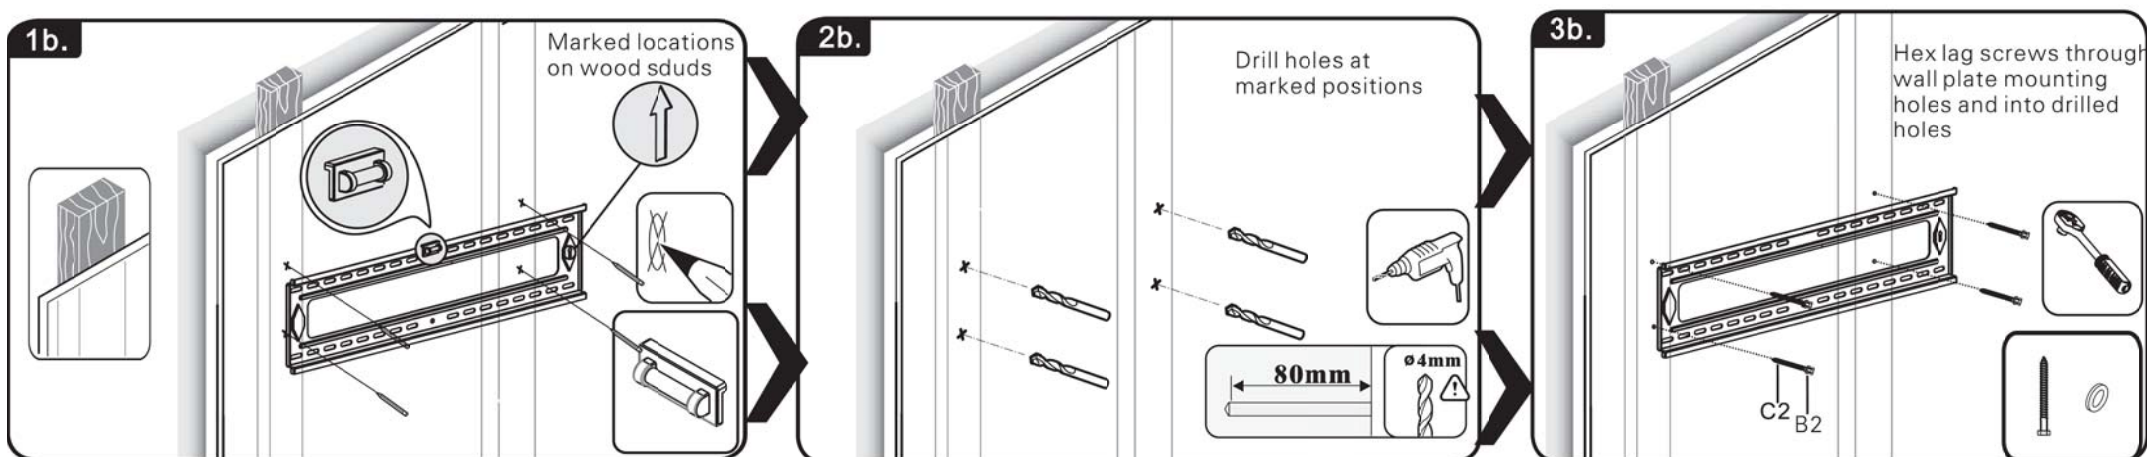

Installation steps

2. Attach TV bracket, select spacers and screws

1. Install TV to brackets as below shown.

Spacers configuration:


a. Mount the spacers above TV bracket for Flat panel back to make TV much close to the wall.

b. Mount the spacers under TV bracket for irregular flat panel back or inset holes or large cables to increase the distance between wall and flat panel.

Warning: (1) Don't put your hand into bracket to prevent clamping. (2) Make sure the adjustment knobs on brackets are oriented to outside edges.

2a. Screws, spacers and washers combination: (A1 or B1 + E1 + 2 * F1) or (C1 + 2 * F1) or (D1 + 2 * G1) as below shown (D70-T).

2b. Screws, spacers and washers combination: (A1 + D1 + 2 * E1) or (B1 + 2 * E1) or (C1 + 2 * F1) as below shown (D90-T).

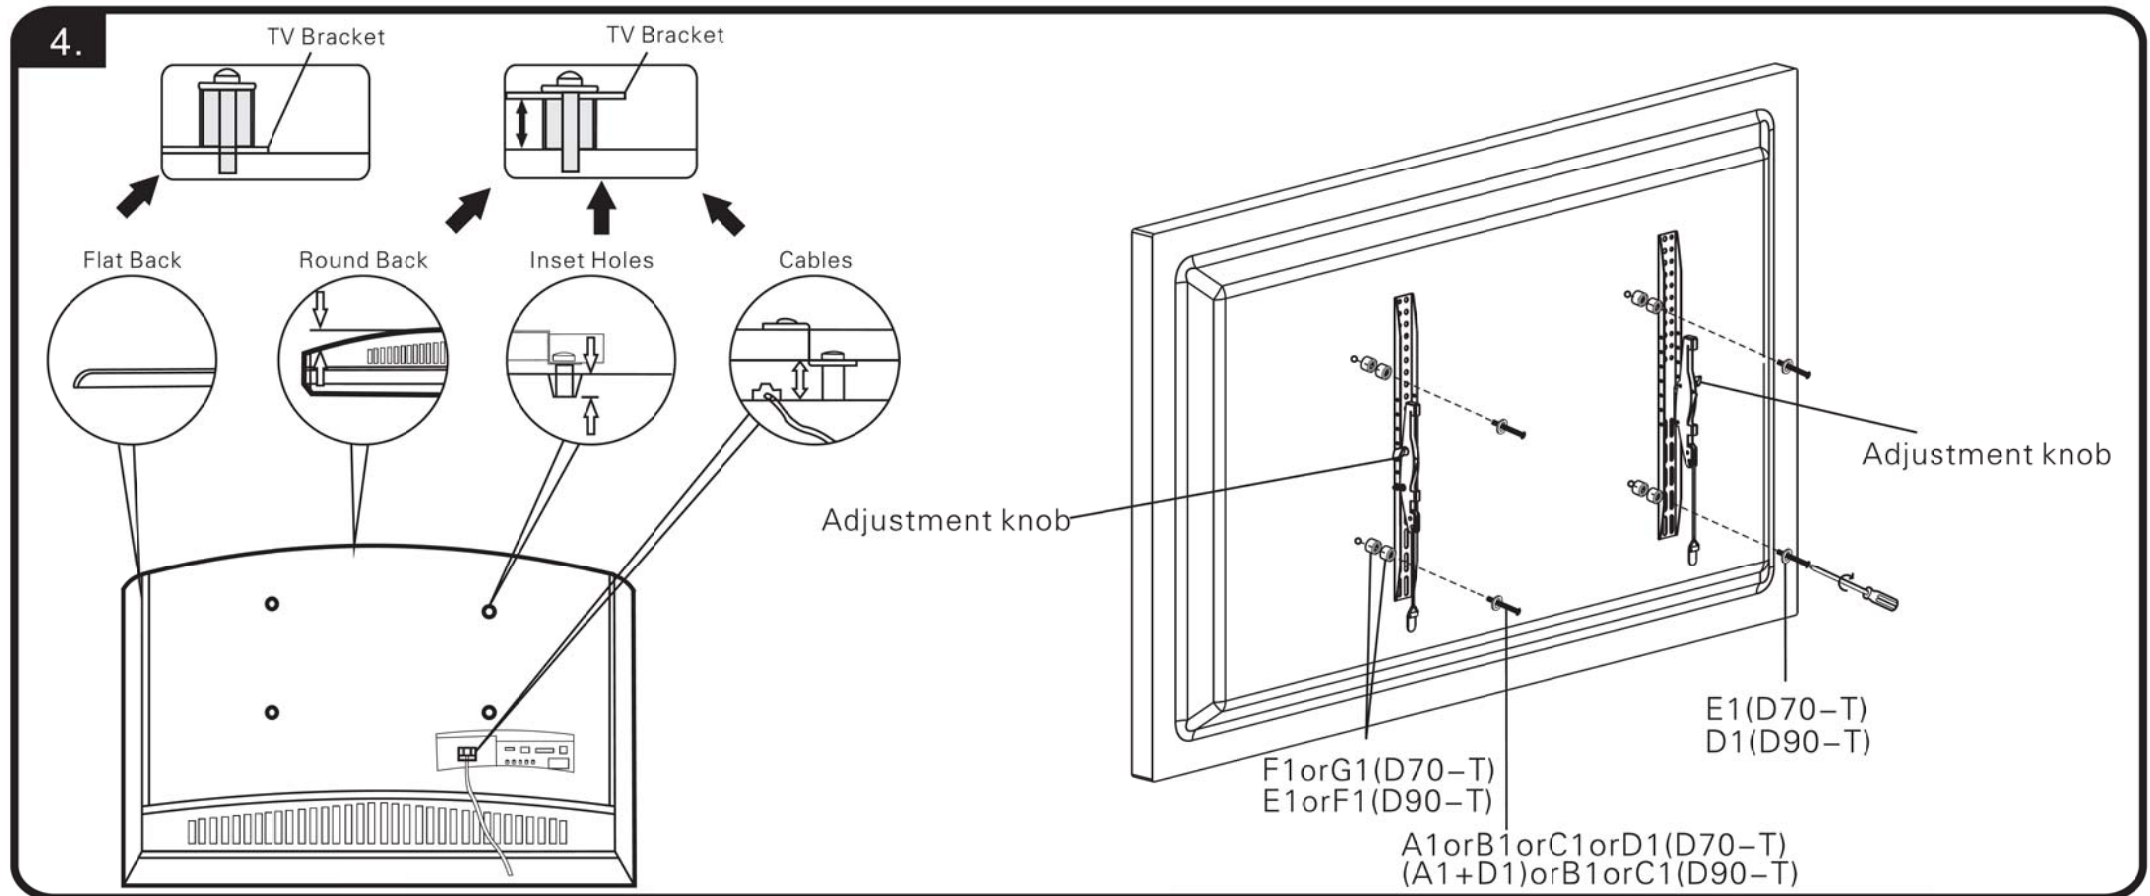


Installation steps

3. Attach TV bracket to wall plate

- (1). Hang bracket's up-slot with TV onto wall plate and then push TV bottom along wall plate to lock into the down-slot.
- (2). The brackets could be moved left and right freely.

5.

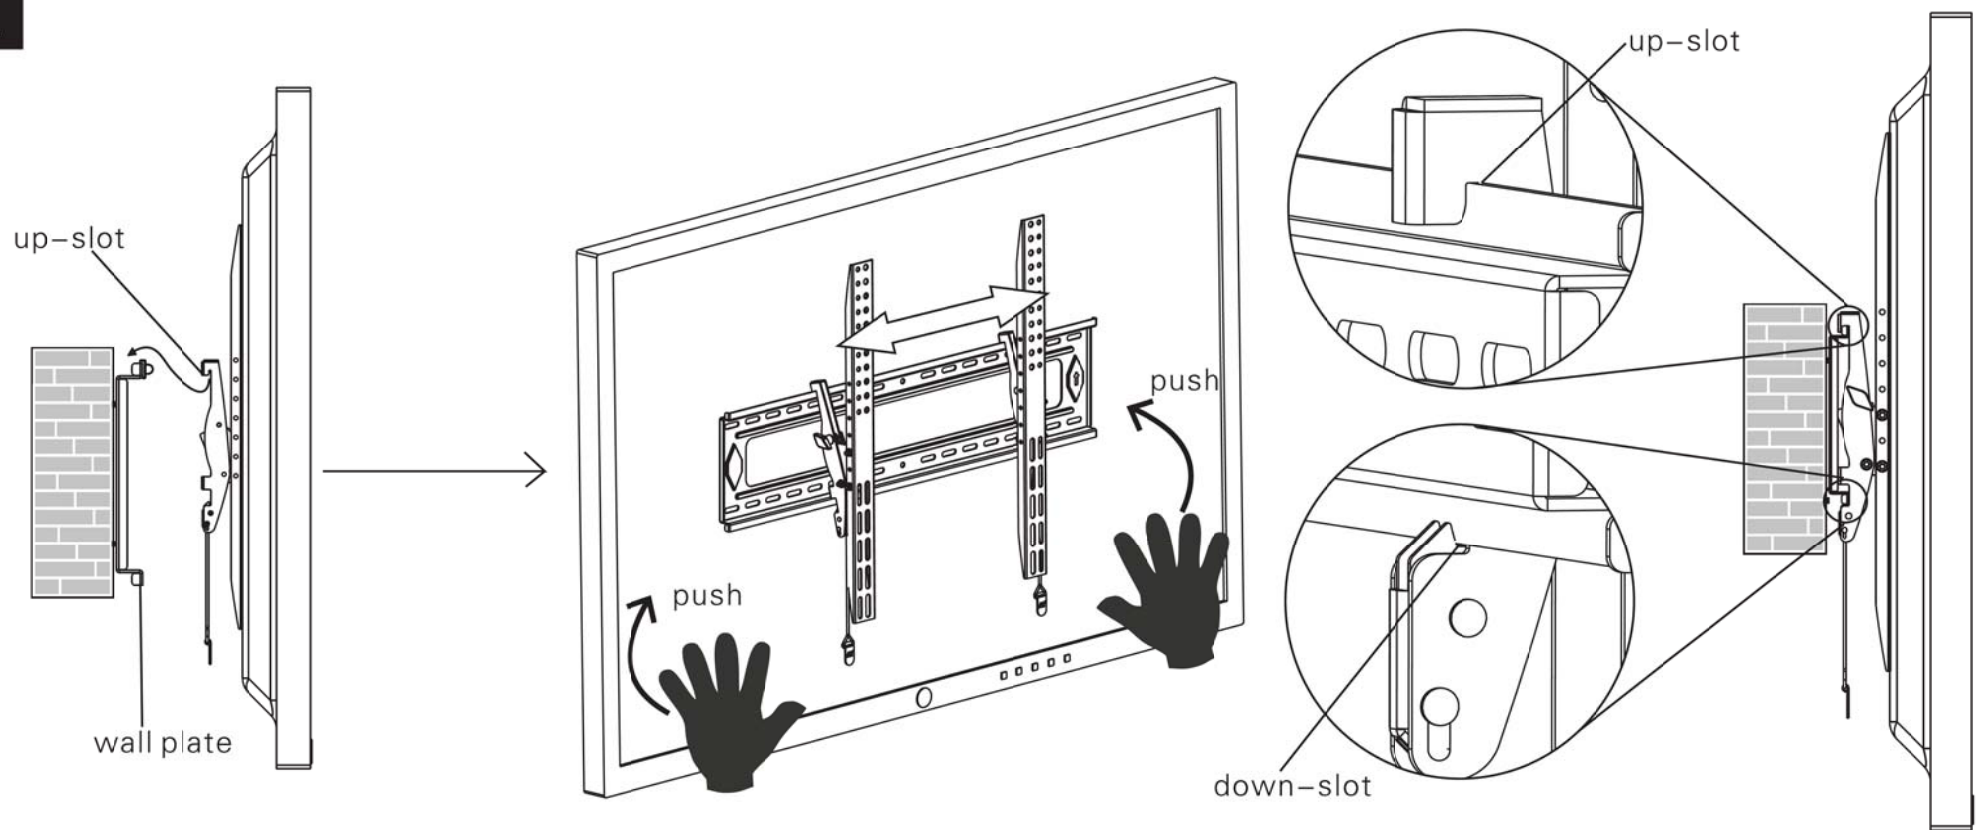

Installation steps


4.TV height and tilt adjustment

(1).Adjust TV height according to below steps to satisfy your viewing requirement.


(2).Fix the viewing angle by loosening and tightening the adjustment knob as below pic.

6.



Remove bolts and nuts

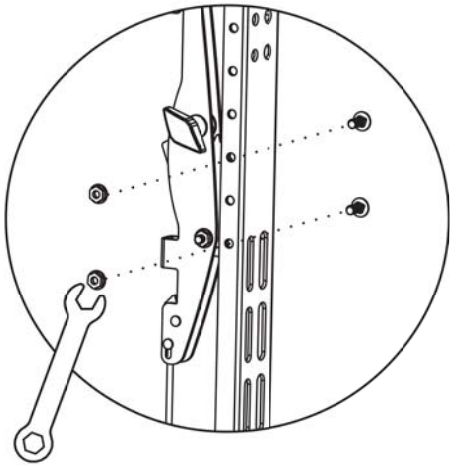

Choose desired holes

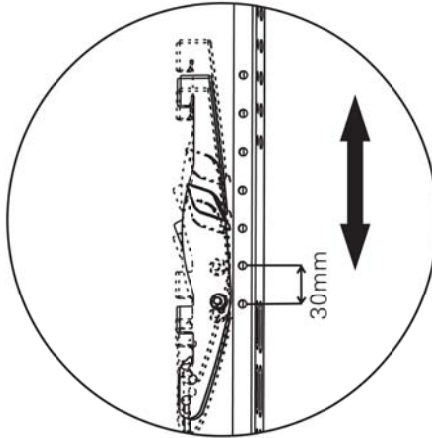


Recover bolts and nuts

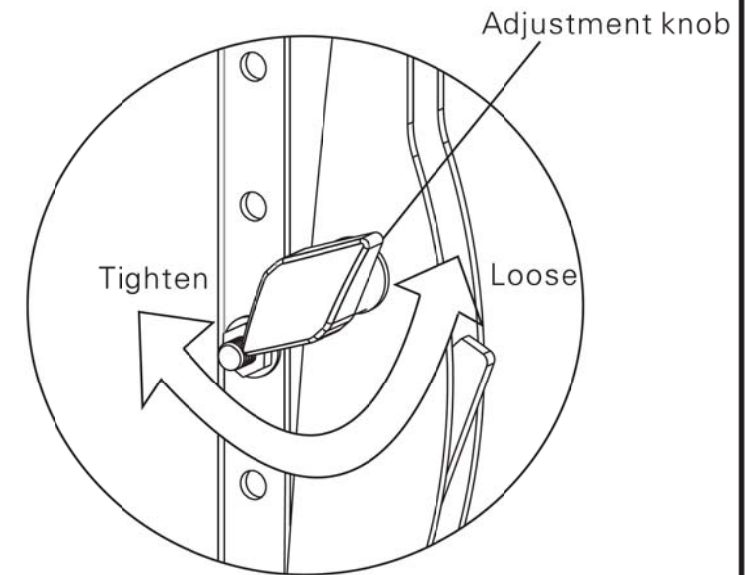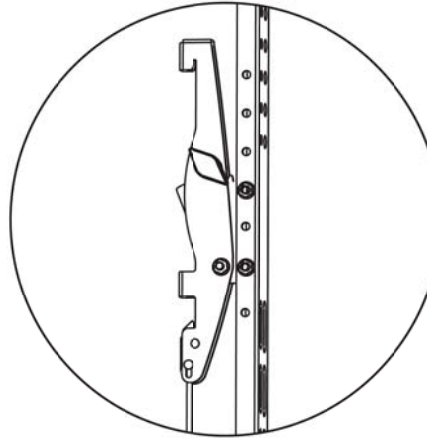

Remove TV from the wall plate


(1). Pull down the nylon cord and then pull out the TV bottom a little space from wall, lift your TV to depart from the wall.

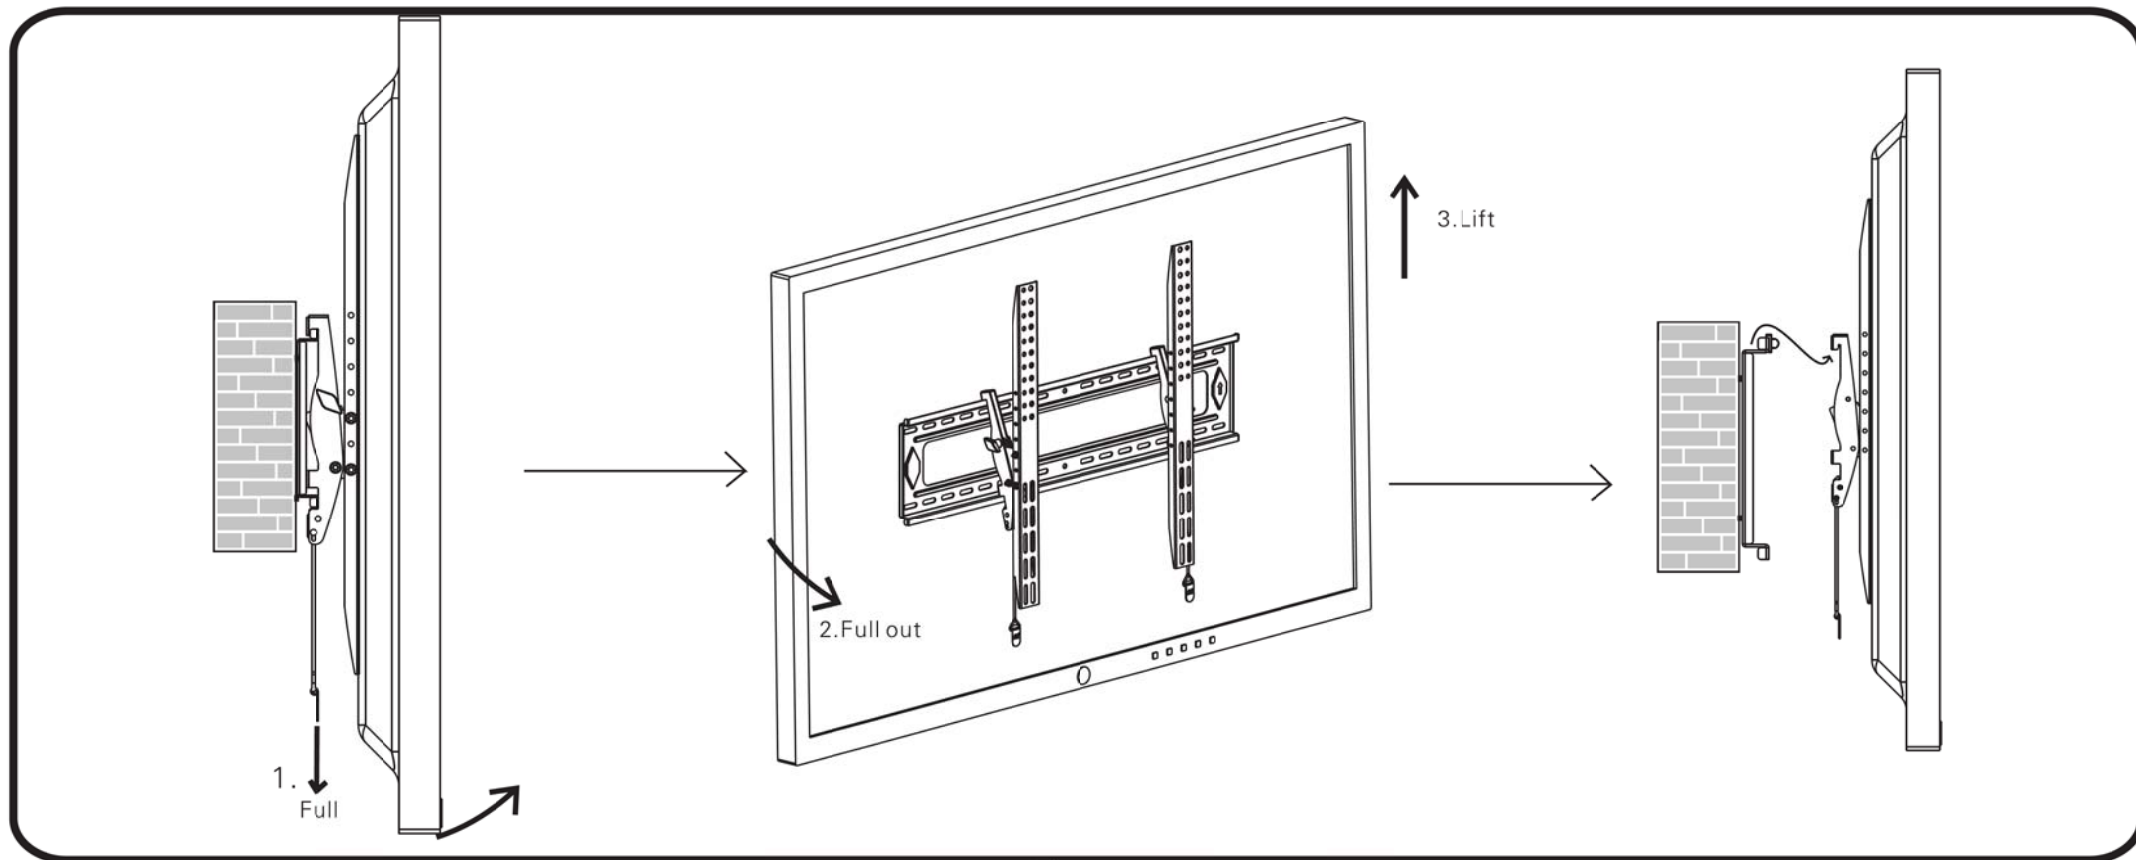


D70-T TV Installation VESA hole and Dimensions

(1).TV Installation VESA holes.

(2).TV mount dimensions.

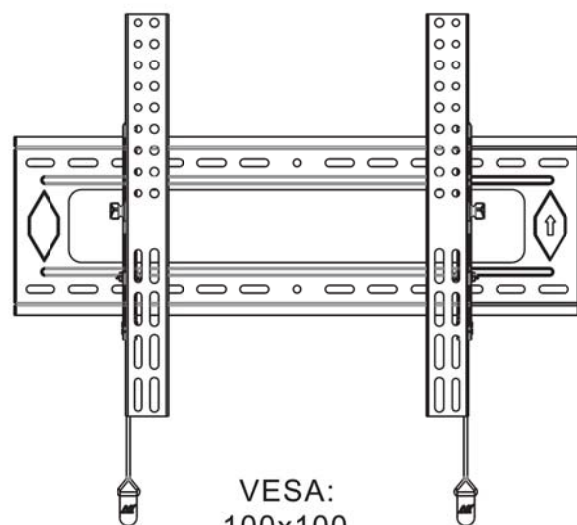

VESA:
100x100
200x100,200x200
300x200,300x300,
400x200, 400x400,,600x400mm

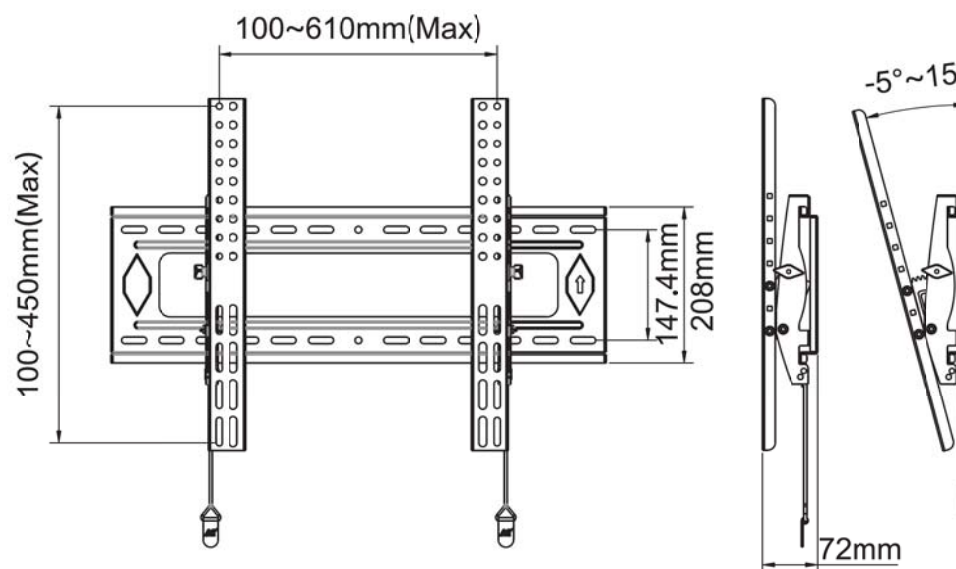

D90-T TV Installation VESA hole and Dimensions

(1).TV Installation VESA holes.

(2).TV mount dimensions.

